


Leaf chain

리프체인

Type -A Leaf Chain (Standard series) A타입 리프체인 (표준형)

Plate exterior, thickness and pin external diameter are identical to those of ANSI Standard roller chains with same pitch.

플레이트의 외형 및 두께, 핀의 외경은 동일피치의 표준형로울러 체인과 같습니다.

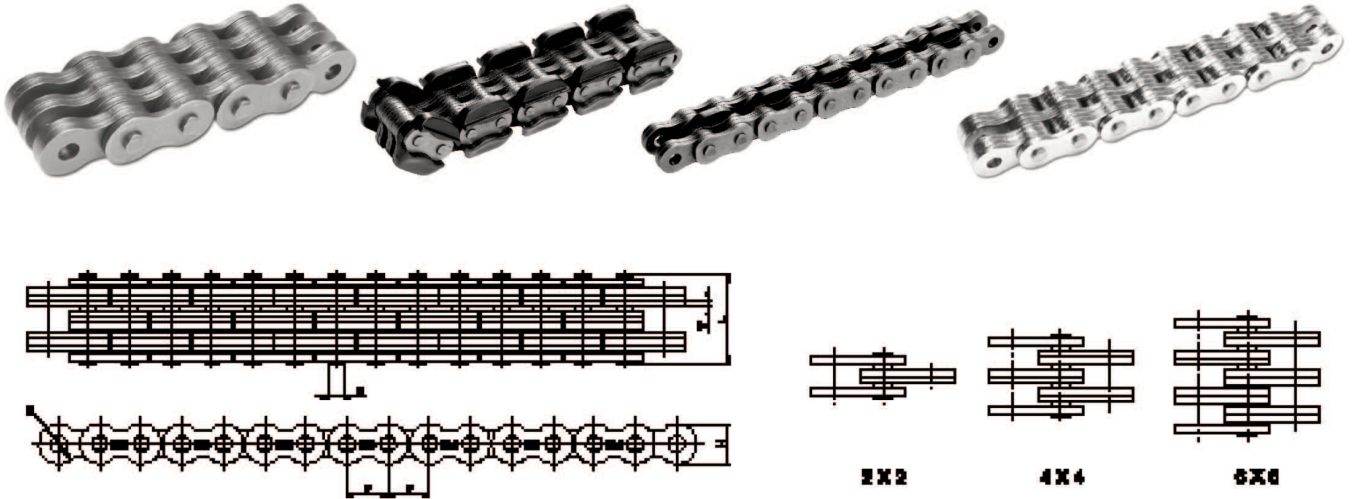

unit : mm

DONG BO Chain No.	Lacing 배열	Pitch P	Plate			Pin		Breaking load (Kgf)		Approx Weight Kg / m
			T	H	S	D	L	DBC	A.N.S.I	
DBC AL-422	2×2	12.70	1.5	10.4	4.02	3.97	8.40	1,700	1,500	0.38
DBC AL-444	4×4	12.70	1.5	10.4	4.02	3.97	14.85	3,400	3,000	0.74
DBC AL-466	6×6	12.70	1.5	10.4	4.02	3.97	21.30	5,100	4,500	1.10
DBC AL-522	2×2	15.875	2.0	13.0	5.13	5.08	10.85	2,800	2,500	0.62
DBC AL-544	4×4	15.875	2.0	13.0	5.13	5.08	19.35	5,600	5,000	1.22
DBC AL-566	6×6	15.875	2.0	13.0	5.13	5.08	27.80	8,400	7,600	1.81
DBC AL-622	2×2	19.05	2.4	15.6	6.00	5.94	12.65	3,900	3,400	0.87
DBC AL-644	4×4	19.05	2.4	15.6	6.00	5.94	22.55	7,800	6,900	1.71
DBC AL-666	6×6	19.05	2.4	15.6	6.00	5.94	32.45	11,700	10,000	2.54
DBC AL-822	2×2	25.40	3.2	20.8	7.97	7.90	16.35	6,600	6,000	1.51
DBC AL-844	4×4	25.40	3.2	20.8	7.97	7.90	29.80	13,200	12,000	2.98
DBC AL-866	6×6	25.40	3.2	20.8	7.97	7.90	43.20	19,800	17,900	4.44
DBC AL-1022	2×2	31.75	4.0	26.0	9.57	9.48	20.05	10,000	8,700	2.69
DBC AL-1044	4×4	31.75	4.0	26.0	9.57	9.48	36.70	20,000	17,500	5.31
DBC AL-1066	6×6	31.75	4.0	26.0	9.57	9.48	53.30	30,000	26,300	7.93
DBC AL-1222	2×2	38.10	4.8	31.2	11.14	11.04	24.20	14,000	12,400	3.57
DBC AL-1244	4×4	38.10	4.8	31.2	11.14	11.04	44.00	28,800	24,900	7.07
DBC AL-1266	6×6	38.10	4.8	31.2	11.14	11.04	63.85	43,200	37,400	10.56
DBC AL-1444	4×4	44.45	5.6	36.4	12.74	12.64	51.30	38,000	31,400	10.34
DBC AL-1466	6×6	44.45	5.6	36.4	12.74	12.64	74.55	57,000	47,200	15.16
DBC AL-1644	4×4	50.80	6.4	41.6	14.32	14.21	58.05	48,000	39,700	12.98
DBC AL-1666	6×6	50.80	6.4	41.6	14.32	14.21	84.45	72,000	59,600	19.41


Note) Plate layouts and dimensions of A, B type Leaf Chains can be custom-made according to order.

주) A · B 타입 리프체인의 플레이트 배열 및 치수는 주문에 따라 변경 제작 가능합니다.

Type -B Leaf Chain (Heavy series) B타입 리프체인 (강력형)

The plate exterior is identical to that of the ANSI Standard Roller Chain, but the plate thickness and the pin external diameter are identical to those of the Roller Chain one size larger.

플레이트의 외형은 표준형 로울러 체인과 동일하나 플레이트의 두께 및 핀외경은 1사이즈 높은 피치의 로울러 체인의 것과 동일합니다.

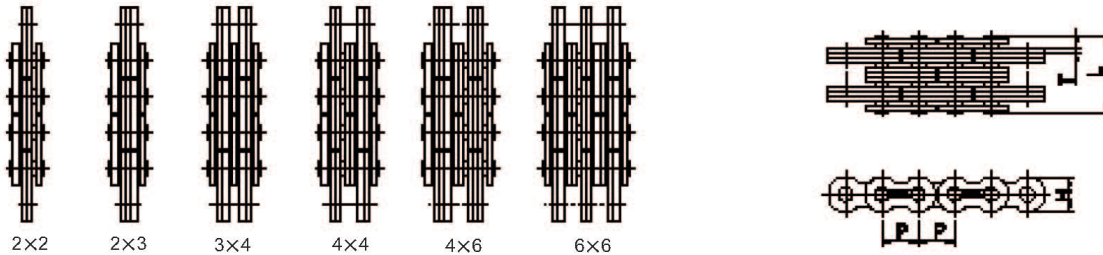

unit : mm

DONG BO Chain No.	Lacing 배열	Pitch P	Plate			Pin		Breaking Load (Kgf)		Approx Weight Kg/m
			T	H	S	D	L	DBC	A.N.S.I	
DBC BL-422	2×2	12.70	2.0	12.0	5.13	5.08	10.85	2,400	2,300	0.68
DBC BL-423	2×3	12.70	2.0	12.0	5.13	5.08	12.95	2,400	2,300	0.84
DBC BL-434	3×4	12.70	2.0	12.0	5.13	5.08	17.20	3,600	3,400	1.13
DBC BL-444	4×4	12.70	2.0	12.0	5.13	5.08	19.41	4,800	4,500	1.28
DBC BL-446	4×6	12.70	2.0	12.0	5.13	5.08	23.60	4,800	4,500	1.65
DBC BL-466	6×6	12.70	2.0	12.0	5.13	5.08	27.80	7,100	6,800	1.96
DBC BL-522	2×2	15.875	2.4	15.0	6.00	5.94	12.65	4,000	3,400	1.07
DBC BL-523	2×3	15.875	2.4	15.0	6.00	5.94	15.10	4,000	3,400	1.27
DBC BL-534	3×4	15.875	2.4	15.0	6.00	5.94	20.10	6,000	5,000	1.69
DBC BL-544	4×4	15.875	2.4	15.0	6.00	5.94	22.56	8,000	6,800	1.89
DBC BL-546	4×6	15.875	2.4	15.0	6.00	5.94	27.50	8,000	6,800	2.40
DBC BL-566	6×6	15.875	2.4	15.0	6.00	5.94	32.45	12,000	10,200	2.80
DBC BL-622	2×2	19.05	3.2	18.1	7.97	7.90	16.38	6,500	5,000	1.68
DBC BL-623	2×3	19.05	3.2	18.1	7.97	7.90	19.75	6,500	5,000	2.04
DBC BL-634	3×4	19.05	3.2	18.1	7.97	7.90	26.45	9,750	7,700	2.83
DBC BL-644	4×4	19.05	3.2	18.1	7.97	7.90	29.80	13,000	10,000	3.18
DBC BL-646	4×6	19.05	3.2	18.1	7.97	7.90	36.50	13,000	10,000	4.01
DBC BL-666	6×6	19.05	3.2	18.1	7.97	7.90	43.20	19,500	15,000	4.73
DBC BL-822	2×2	25.40	4.0	24.1	9.57	9.48	20.17	10,500	8,600	2.59
DBC BL-823	2×3	25.40	4.0	24.1	9.57	9.48	24.20	10,500	8,600	3.20
DBC BL-834	3×4	25.40	4.0	24.1	9.57	9.48	32.55	15,800	13,200	4.44
DBC BL-844	4×4	25.40	4.0	24.1	9.57	9.48	36.90	19,400	17,300	5.04
DBC BL-846	4×6	25.40	4.0	24.1	9.57	9.48	45.00	19,400	17,300	6.32
DBC BL-866	6×6	25.40	4.0	24.1	9.57	9.48	53.30	29,200	25,900	7.54
DBC BL-1022	2×2	31.75	4.8	30.1	11.14	11.04	23.98	14,400	11,800	3.76
DBC BL-1023	2×3	31.75	4.8	30.1	11.14	11.04	28.90	14,400	11,800	4.69
DBC BL-1034	3×4	31.75	4.8	30.1	11.14	11.04	38.85	22,000	18,600	6.55
DBC BL-1044	4×4	31.75	4.8	30.1	11.14	11.04	43.39	28,000	23,600	7.48
DBC BL-1046	4×6	31.75	4.8	30.1	11.14	11.04	53.70	28,800	23,600	9.29
DBC BL-1066	6×6	31.75	4.8	30.1	11.14	11.04	63.85	43,200	35,500	11.16
DBC BL-1222	2×2	38.10	5.6	36.2	12.74	12.64	28.04	19,000	15,500	4.83
DBC BL-1223	2×3	38.10	5.6	36.2	12.74	12.64	33.90	19,000	15,500	6.54
DBC BL-1234	3×4	38.10	5.6	36.2	12.74	12.64	45.50	30,500	25,000	9.10
DBC BL-1244	4×4	38.10	5.6	36.2	12.74	12.64	51.30	38,000	30,900	10.39
DBC BL-1246	4×6	38.10	5.6	36.2	12.74	12.64	62.95	38,000	30,900	12.01
DBC BL-1266	6×6	38.10	5.6	36.2	12.74	12.64	74.57	57,000	46,400	14.58
DBC BL-1422	2×2	44.45	6.4	42.2	14.32	14.21	31.62	24,000	19,500	7.31
DBC BL-1423	2×3	44.45	6.4	42.2	14.32	14.21	38.20	24,000	19,500	9.06
DBC BL-1434	3×4	44.45	6.4	42.2	14.32	14.21	51.40	39,500	32,300	11.32
DBC BL-1444	4×4	44.45	6.4	42.2	14.32	14.21	58.05	48,000	39,100	12.96
DBC BL-1446	4×6	44.45	6.4	42.2	14.32	14.21	71.25	48,000	39,100	18.00
DBC BL-1466	6×6	44.45	6.4	42.2	14.32	14.21	84.46	72,000	59,100	22.51
DBC BL-1622	2×2	50.80	7.2	48.2	17.49	17.38	35.59	36,000	29,500	9.84
DBC BL-1623	2×3	50.80	7.2	48.2	17.49	17.38	43.25	36,000	29,500	12.16
DBC BL-1634	3×4	50.80	7.2	48.2	17.49	17.38	58.40	56,500	45,000	16.95
DBC BL-1644	4×4	50.80	7.2	48.2	17.49	17.38	65.86	72,000	59,100	18.97
DBC BL-1646	4×6	50.80	7.2	48.2	17.49	17.38	81.05	72,000	59,100	24.09
DBC BL-1666	6×6	50.80	7.2	48.2	17.49	17.38	96.15	108,100	88,600	28.73
DBC BL-2022	2×2	63.50	9.5	60.3	23.84	23.73	47.94	54,000	44,300	14.43
DBC BL-2023	2×3	63.50	9.5	60.3	23.84	23.73	57.90	54,100	44,300	17.95
DBC BL-2034	3×4	63.50	9.5	60.3	23.84	23.73	77.82	81,100	66,400	24.95
DBC BL-2044	4×4	63.50	9.5	60.3	23.84	23.73	87.78	108,200	88,600	28.45
DBC BL-2046	4×6	63.50	9.5	60.3	23.84	23.73	107.70	108,200	88,600	35.44
DBC BL-2066	6×6	63.50	9.5	60.3	23.84	23.73	127.62	162,300	133,000	42.01